

Technical data sheet

BIONIC FIRE™ EVO

200



OPTIONS

Firebox door	
Steel door	✓
Glass door	✓
Coating	
Black	✓
Nickel	✓
Sand	✓
Air control	
CleverAIR™	✓
AIR-System	
for room air independent installation	✓
Rotating console	
Rotating console	✓ With a rotating console, smoke outlet is only possible upwards.
Convection	
Convection regulator	✓



200



Technical data sheet

BIONIC FIRE™ EVO

200



PRODUCT INFORMATION

Weight depending on model/equipment	
Weight depending on model/equipment	180 kg
Ø Smoke outlet	
Ø Smoke outlet	150 mm
Ø Air inlet	
Ø Air inlet	100 mm
Flue pipe outlet	
Top	✓
Rear 101 ms	✓
Certifications 6.4.23	
Energy efficiency class	A+
Multiple occupancy	✓
Eco Design	✓
EN NORM	EN 13240
MINERGIE® compatible	✓
BImSchV	Stufe 2
Flamme Verte	✓
Classe energetica di appartenenza	5 Stelle

All information is provided without guarantee. Sketches are not true to scale.

22.04.2026 | 2 / 5

ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch

200



Technical data sheet

BIONIC FIRE™ EVO

200



SERVICES

Thermal output	
Nominal heat output	4.6 kW
Thermal output range min./max.	3-5.5 kW
Fuelwood requirement	1.2 ≈ kg/h
Energy efficiency	86 %
Combustion air requirement	15.1 m ³ /h
Triple values	
Exhaust gas mass flow	5.1 g/s
Exhaust temperature	166 °C
Required delivery pressure	12 Pa
Required delivery pressure at 0.8 times the nominal heat output	10 Pa
Fire safety	
Dust at 13 % O ₂	4 mg/Nm ³
CO emission at 13 % O ₂	0.024 %
CO emission at 13 % O ₂	300 mg/Nm ³
CO ₂ concentration	8.4 %
OGC at 13 % O ₂	11 mg/Nm ³
NO _x at 13 % O ₂	100 mg/Nm ³

All information is provided without guarantee. Sketches are not true to scale.

22.04.2026 | 3 / 5

ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch

200



Technical data sheet

BIONIC FIRE™ EVO

200



INSTALLATION

Distances to combustible materials (without side window)	
A: to the back	80 mm
B: to the side wall	200 mm
C: to the front	500 mm
D: upwards	750 mm

Note

Please observe the national/regional regulations for floor protection.

200







Technical data sheet

BIONIC FIRE™ EVO

200



Sketches of safety distances

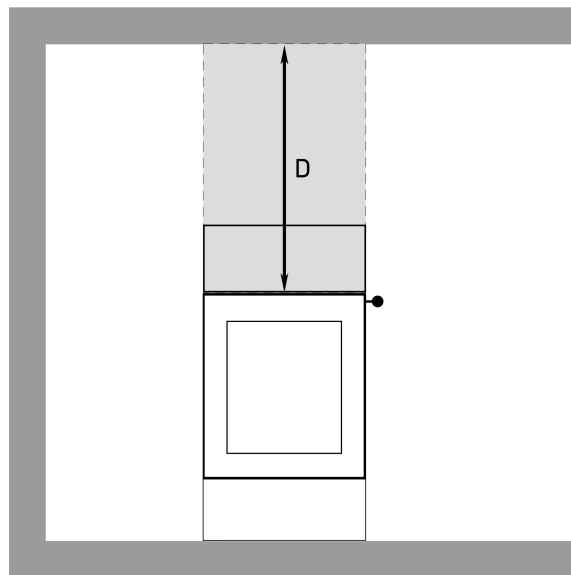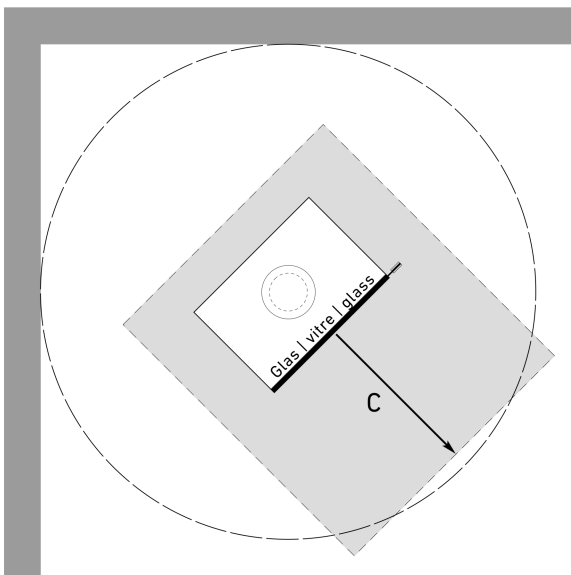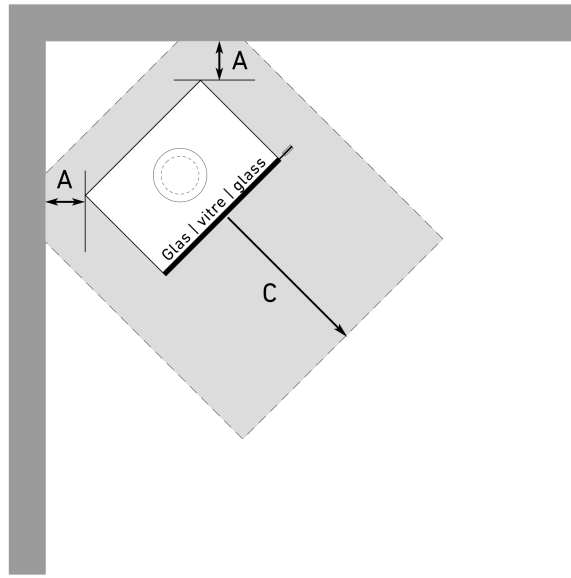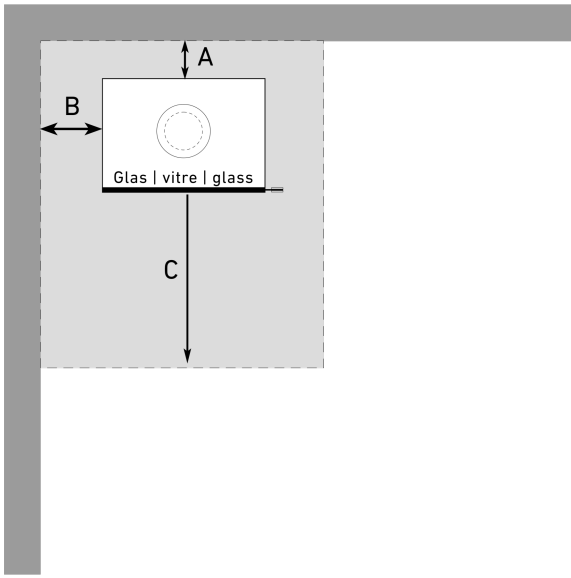

All information is provided without guarantee. Sketches are not true to scale.

22.04.2026 | 5 / 5

ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch

200

