Technical data sheet
R-600

200

OPTIONS

Firebox door	
Steel door	✓
Glass door	✓
Coating	
Black	✓
AIR-System	
for room air independent installation	✓



PRODUCT INFORMATION

Weight depending on model/equipment	
Weight depending on model/equipment	100 kg
Ø Smoke outlet	
Ø Smoke outlet	150 mm
Ø Air inlet	
Ø Air inlet	100 mm
Certifications	
Energy efficiency class	A
Multiple occupancy	✓
Eco Design	✓
EN NORM	EN 13229
BImSchV	Stufe 2
Flamme Verte	✓
Classe energetica di appartenenza	4 Stelle

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200

attika
FEUERKULTUR

Technical data sheet
R-600

SERVICES

Thermal output	
Nominal heat output	5.8 kW
Thermal output range min./max.	4-8 kW
Fuelwood requirement	1.8 ≈ kg/h
Energy efficiency	76 %
Triple values	
Exhaust gas mass flow	6.1 g/s
Exhaust temperature	306 °C
Required delivery pressure	12 Pa
Required delivery pressure at 0.8 times the nominal heat output	10 Pa
Fire safety	
Dust at 13 % O2	5 mg/Nm^3
CO emission at 13 % O2	0.0915 %
CO emission at 13 % O2	1144 mg/Nm^3
CO2 concentration	9.6 %
OGC at 13 % O2	54 mg/Nm^3
NOx at 13 % O2	69 mg/Nm^3

INSTALLATION

Furniture distance from the front glass	
A: Furniture distance from the front glass	1100 mm
Furniture distance from the side glass	
B: Furniture distance from the side glass	950 mm

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch


Technical data sheet
R-600

200

CONVECTION AIR

Convection air above	min. 500 cm^2
Convection air below	min. 250 cm^2

Installation

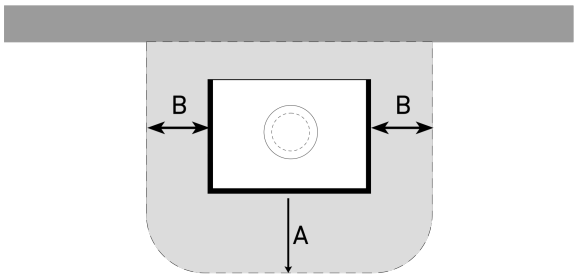

ATTIKA FEUER AG I Brunnmatt 16 I CH-6330 Cham I Tel. +41 41 784 80 80 I info@attika.ch I www.attika.ch

200