

Technical data sheet

VISIO 3 ELEMENT

200



OPTIONS

Support frame	
Black, 6mm	✓
Stainless steel, 6mm	✓
Window frame	
Black	✓
Stainless steel	✓
Handles	
Oak wood handle dark stained	✓
Stainless steel	✓
Steel black	✓
AIR-System	
for room air independent installation	✓
Additional concrete element	
Additional concrete element	1 stk



200



Technical data sheet

VISIO 3 ELEMENT

200



PRODUCT INFORMATION

Ø Smoke outlet	
Ø Smoke outlet	200 mm
Ø Air inlet	
Ø Air inlet	150 mm
Flue pipe outlet	
Top	✓
Rear	✓
Certifications	
Energy efficiency class	A
Eco Design 2015/1084/2015	✓
EN NORM	EN 13240
BImSchV	Stufe 2
Flamme Verte	✓
Classe energetica di appartenenza	4 Stelle

All information is provided without guarantee. Sketches are not true to scale.

24.04.2026 | 2 / 4

ATTIKA FEUER AG | Brunnmatt 16 | CH-6330 Cham | Tel. +41 41 784 80 80 | info@attika.ch | www.attika.ch

200



Technical data sheet

VISIO 3 ELEMENT

200



SERVICES

Thermal output	
Nominal heat output	7 kW
Thermal output range min./max.	5-9 kW
Fuelwood requirement	2 ≈ kg/h
Energy efficiency	80 %
Combustion air requirement	23.4 m ³ /h
Triple values	
Exhaust gas mass flow	7.5 g/s
Exhaust temperature	243 °C
Required delivery pressure	12 Pa
Required delivery pressure at 0.8 times the nominal heat output	10 Pa
Fire safety	
Dust at 13 % O ₂	5 mg/Nm ³
CO emission at 13 % O ₂	0.09 %
CO emission at 13 % O ₂	1150 mg/Nm ³
OGC at 13 % O ₂	45 mg/Nm ³
NO _x at 13 % O ₂	81 mg/Nm ³

INSTALLATION

Distances to combustible materials (with side window)	
B: to the side wall	750 mm
C: to the front	1200 mm
D: upwards	500 mm

All information is provided without guarantee. Sketches are not true to scale.

24.04.2026 | 3 / 4

200



Technical data sheet

VISIO 3 ELEMENT

200





Note

Maximum weight supported by the frame: 200 kg.

Please observe the national/regional regulations for floor protection.

Sketches of safety distances

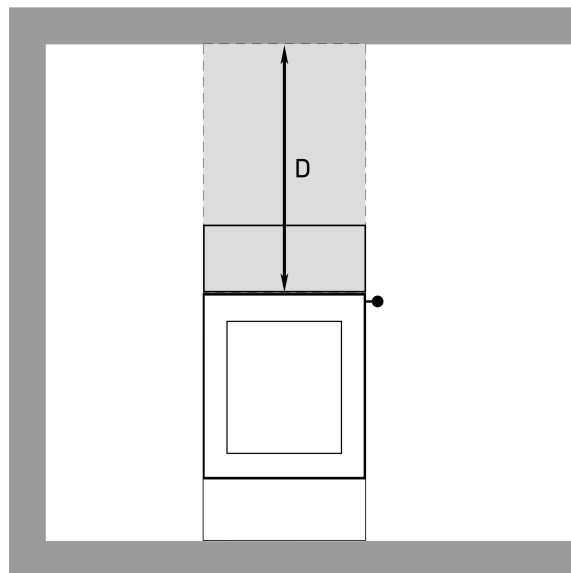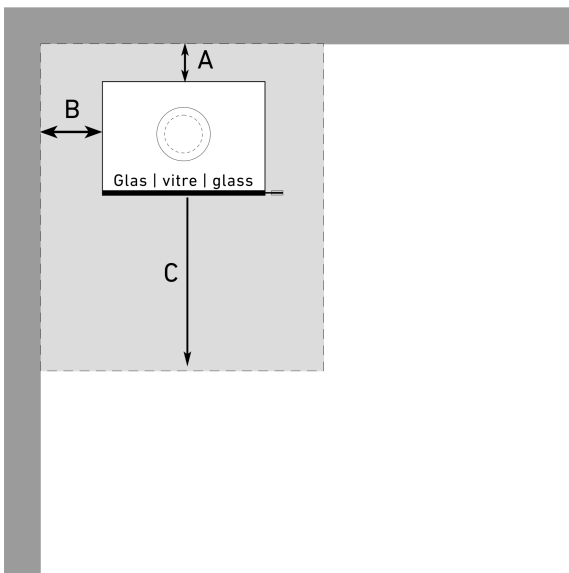

200

